


Electrical Characteristics :
 Insulation Resistance : 500MQ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

PART NO : 5 2 8 8 - B * 1

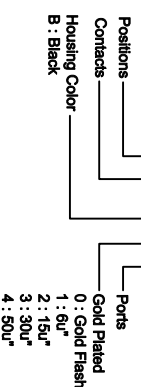

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 52 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	
(B)					
(C)					
(D)					
(E)					

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

 **博 崴 電 子 股 份 有 限 公 司**
POWERWAY ELECTRONICS CO.,LTD.

TITLE	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK	UNIT	mm
圖名		單位	inch
PART NO.	5288-B*1	SCALE	1:1
料號		比例	
REV.	A.1	DATE	2007-01-22
版本	日期		
CHECKED BY	Michael	DRAWN BY	Valiant
審核		製圖	