


SUGGESTED PCB LAYOUT  
TOP VIEW

**Electrical Characteristics :**  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 30mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 Shield : Brass, Nickel Plating.

CUL File No : E215573

PART NO : 5288-B\*10

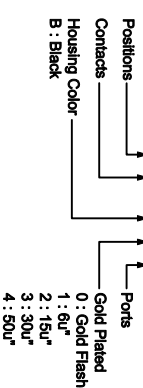

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 52 (SERIES)
Ⓐ	A.1	Withstand Voltage 500修改为1000VAC ; 新增尺寸2.3mm	2008-08-01	Nick	TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
Ⓑ					
Ⓒ					
Ⓓ					
Ⓔ					

		<b>博 歲 電 子 股 份 有 限 公 司</b> <b>POWERWAY ELECTRONICS CO.,LTD.</b>	
		TITLE	SHIELDED RJ45
PART NO.	圖 名	SIDE ENTRY PCB JACK	UNIT
5288-B*10	料 號		mm
REV. A.1	版本	DATE 2007-05-07	inch
CHECKED BY 睿 核	日期	DATE	SCALE 1:1
	DATE	2007-05-07	比例
	DATE		製 圖
	DATE		Valiant