


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel

PART NO : 5 3 4 4 - B * 1

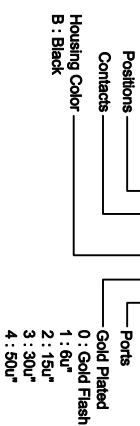

ZONE	REV.	DESCRIPTION	DATE	APPD.
Ⓐ	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
Ⓑ				
Ⓒ				
Ⓓ				
Ⓔ				

FILE NO : 53 (SERIES)

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

	博 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.	
	TITLE	4P4C TOP ENTRY PCB JACK
PART NO.	5344-B*1	UNIT
REV.	A.1	DATE
CHECKED BY	Michael	DRAWN BY
審 核		製 圖
SCALE	1:1	Valiant