


Electrical Characteristics :
 Insulation Resistance : 500M Ω Min.
 Contact Resistance : 30m Ω Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

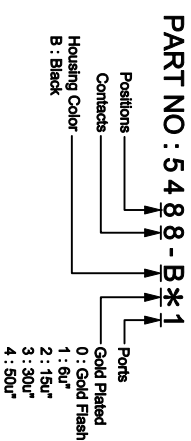

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 54 (SERIES)
Ⓐ	A.1	Withstand Voltage 500修改為 1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm \pm 0.075 mm 0.00 mm \pm 0.15 mm 0.0 mm \pm 0.25 mm
Ⓑ					
Ⓒ					
Ⓓ					
Ⓔ					

博 威 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.		TITLE		UNIT	
		NON-SHIELDED R445 SIDE ENTRY PCB JACK		mm	
PART NO.		5488-B*1		SCALE	
REV. 料 號		A.1		1 : 1	
REV. 版本		DATE 日期		2007-01-29	
CHECKED BY 審 核		Michael		DRAWN BY 製 圖	
				Valiant	