


**Electrical Characteristics :**  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 30mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

**Material:**  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 CUL File No : E215573

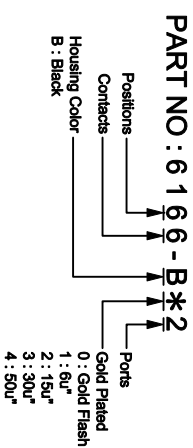

| ZONE | REV. | DESCRIPTION                     | DATE       | APPD. | FILE NO : 61 (SERIES)  |
|------|------|---------------------------------|------------|-------|--|
| (A)  | A.1  | Withstand Voltage 500修改為1000VAC | 2008-08-01 | Nick  | <b>TOLERANCE(公差) :</b><br>0.000 mm ± 0.075 mm<br>0.00 mm ± 0.15 mm<br>0.0 mm ± 0.25 mm |
| (B)  |      |                                 |            |       |  |
| (C)  |      |                                 |            |       |  |
| (D)  |      |                                 |            |       |  |
| (E)  |      |                                 |            |       |  |

|            |      |  |          |
|------------|------|--|----------|
|            |      | <b>博 崙 電 子 股 份 有 限 公 司</b><br><b>POWERWAY ELECTRONICS CO.,LTD.</b> |          |
|            |      | <b>DUAL PORTS RJ11</b><br><b>6P6C SIDE ENTRY PCB JACK</b>          |          |
| TITLE      | 圖名   | 6166-B*2   |          |
| PART NO.   | 料號   | 6166-B*2   |          |
| REV.       | 版本   | DATE   | 日期       |
| A.1        |      | 2007-01-22   |          |
| CHECKED BY | 審核   | MICHAEL  | DRAWN BY |
|            |      |  | Valiant  |
| UNIT       | 單位   | SCALE  | 比例       |
| mm         | inch | 1:1  |          |