


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

PART NO : 6 7 6 4 - B * 1

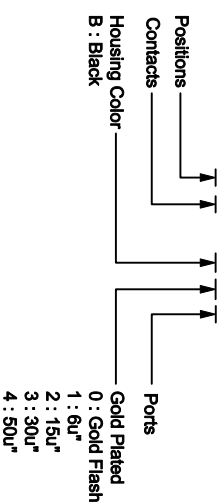

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO.: 67 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

		博 崙 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.			
		NON-SHIELDED RJ11 TOP ENTRY PCB JACK			
TITLE	NON-SHIELDED RJ11 TOP ENTRY PCB JACK			UNIT	mm
PART NO.	6764-B*1			SCALE	1:1
REV.	A.1	DATE	2007-12-06		
CHECKED BY	Michael	DRAWN BY		Chindge	
審 核		製 圖			