


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

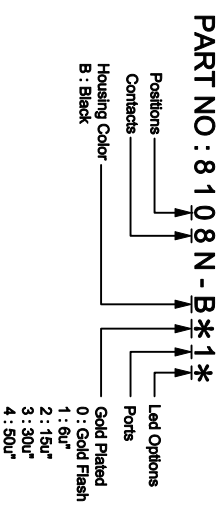

LED Color Options Table

LED Color Options	LED 1 (Right)	LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 81 (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

		博 崙 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.	
		TITLE	NON-SHIELDED RJ45 SIDE ENTRY PCB JACK
PART NO.	8108N-B*1*	REV.	A.1
料 號		DATE	2007-11-30
版本		CHECKED BY	Michael
審 核		DATE	2007-11-30
		DRAWN BY	製 圖
		SCALE	1:1
		UNIT	mm
		單位	Inch
		比例	1:1
			Valiant