


Electrical Characteristics :
 Insulation Resistance : 500M Ω Min.
 Contact Resistance : 50m Ω Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A


Material:

Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

PART NO : 5 3 6 6 C - B * 1

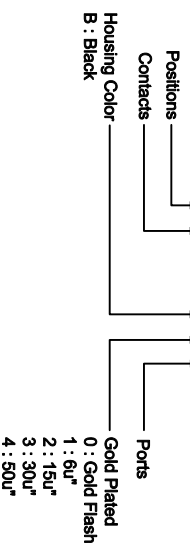

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 5366C (SERIES)
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm \pm 0.075 mm 0.00 mm \pm 0.15 mm 0.0 mm \pm 0.25 mm
(B)					
(C)					
(D)					
(E)					

 博 崙 電 子 股 份 有 限 公 司 POWERWAY ELECTRONICS CO.,LTD.		TITLE	NON SHIELDED RJ11	UNIT	mm
		圖 名	TOP ENTRY PCB JACK	單位	inch
PART NO.	5366C-B*1	SCALE	1:1		
料 號		比例			
REV.	A.1	DATE	2007-11-20		
版本		日期			
CHECKED BY	Michael	DRAWN BY	Michael		
審 核		製 圖			
			David		