

(A)

LED Polarity Table
(Applicable only for single-colored LED)


編號	LED 2 (Left)	LED 1 (Right)
0	D1	D3
1	D1	D2
2	D1	D4

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0
 Contact : 0.35mm Thickness Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 Shield : See Shield Material Table.
 Shield Cover : See Shield Material Table.

PART NO : S U A J - 2 8 A 0 - 0 * * - 0 0 - B * *

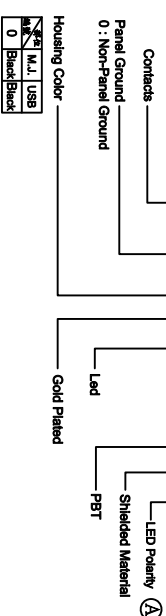

Gold Plated

LED Color Options Table

編號	M.J.	USB
0	3u"	
1	6u"	1, 1
2	15u"	
3	30u"	
4	50u"	
5	3u"	
6	6u"	
7	15u"	2, 0
8	30u"	
9	50u"	

LED 2 (Left)	LED 1 (Right)	LED DASH OPTION
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Yellow	Green	5
Orange/Green	Yellow	6
Yellow/Green	Orange/Green	7
Orange/Green	Yellow/Green	8
Yellow/Green	Yellow	9

Code	Shield	Shield Cover
0	SUS	Non
1	Triplate	Triplate
2	SUS	Non

SUGGESTED PCB LAYOUT
TOP VIEW

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick
(B)				
(C)				
(D)				
(E)				

FILE NO : SUAJ (SERIES)

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

TITLE	圖名	UNIT
RJ45 / DUAL USB Combo <td></td> <td>mm</td>		mm
PART NO. <td>SUAJ-28A0-0* *-00-B**</td> <td>inch</td>	SUAJ-28A0-0* *-00-B**	inch
REV. <td>A.1</td> <td>SCALE</td>	A.1	SCALE
版本	日期	比例
CHECKED BY	Aaron	1 : 1
審核	製圖	Michael

PW 博 戴 電 子 股 份 有 限 公 司
 POWERWAY ELECTRONICS CO.,LTD.