


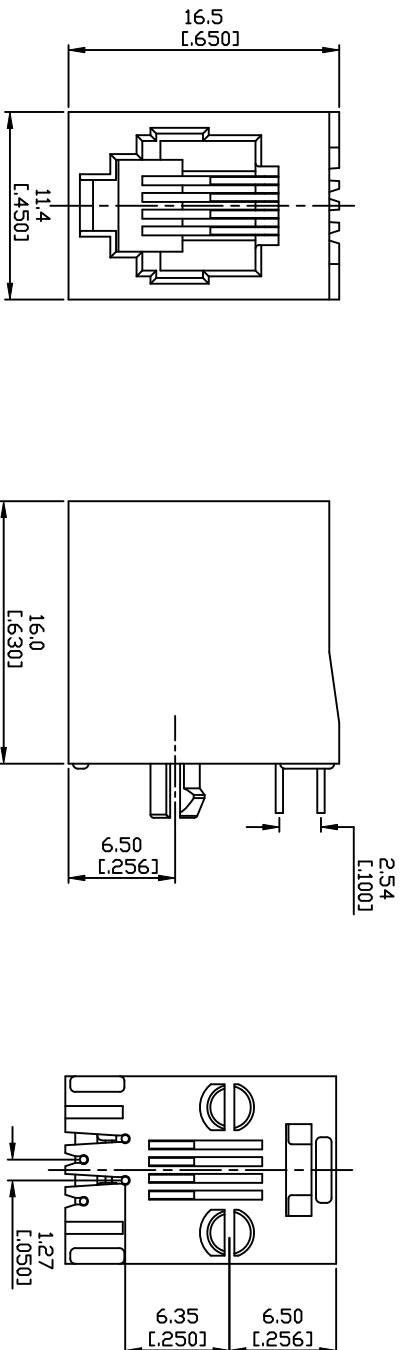


Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 30mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing : Thermoplastic UL94V-0
Contact : Full Gold Plating
Spring Wire : Dia 0.45mm Phosphor Bronze
Optional Gold Plating Over Nickel

PART NO : 5 3 A 4 4 - B * 1

Positions	↓ ↓ ↓ ↓ ↓	Ports
Contacts	↓ ↓ ↓ ↓ ↓	Gold Plated
Housing Color	↓ ↓ ↓ ↓ ↓	0 : Gold Flash
		1 : 6u"
		2 : 15u"
		3 : 30u"
		4 : 50u"

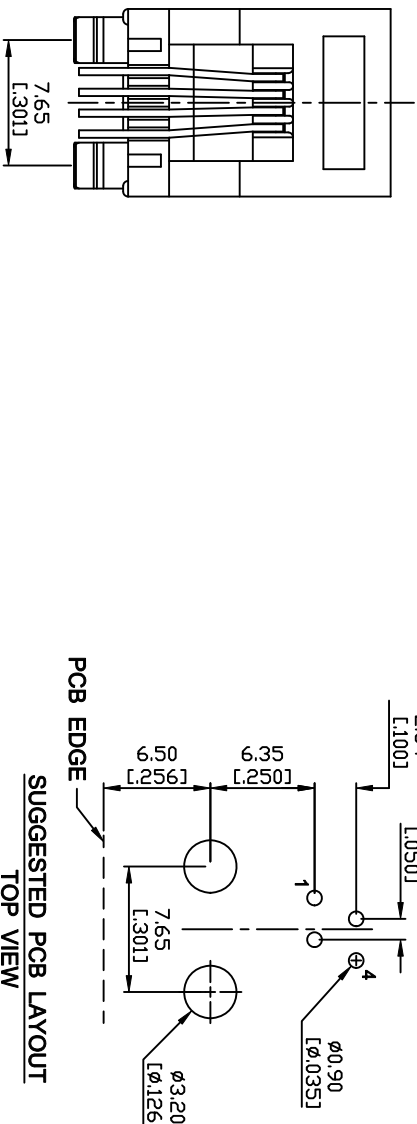

SUGGESTED PCB LAYOUT
TOP VIEW

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 53 (SERIES)	TITLE	4P4C TOP ENTRY PCB JACK	UNIT
①	A.1	Withstand Voltage 500修改為 1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	圖 名		mm
②						PART NO.	53A44-B * 1	inch
③						REV.	A.1	
④						DATE	2007-04-19	
⑤						CHECKED BY	Michael	
						審 核		
						DRAWN BY	製 圖	
						Valiant		

博 崙 電 子 股 份 有 限 公 司
POWERWAY ELECTRONICS CO.,LTD.