

Electrical Characteristics :
Insulation Resistance : 500M Ω Min.
Contact Resistance : 50m Ω Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0




Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze

Plated With Gold And Tin In Solder Area.

CUL File No : E215573

PART NO: 5388B-B*1-L

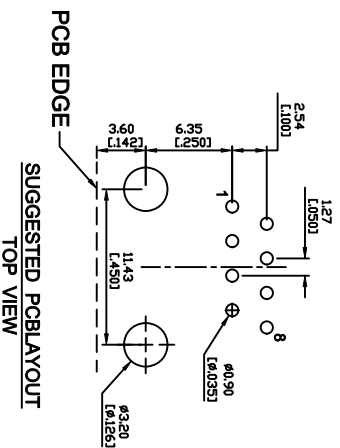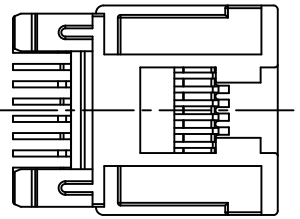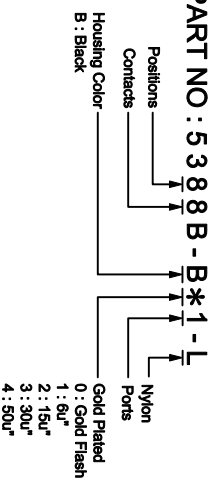

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 53 (SERIES)	TITLE 圖名	RJ45 TOP ENTRY PCB JACK	UNIT 單位	mm inch
①					TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料號 REV. 版本 CHECKED BY 審核	5388B-B*1-L	SCALE 比例	 1:1
②									
③									
④									
⑤									
						DRAWN BY 製圖	Valiant		



博威電子股份有限公司
POWERWAY ELECTRONICS CO.,LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 53 (SERIES)	TITLE 圖名	UNIT 單位
①						RJ45 TOP ENTRY PCB JACK	mm inch

②			TOLERANCE(公差): 0.000 mm + 0.075 mm	PART NO. 料 號	5388B-B*1-L	SCALE
③		比例				
B		1:1				

					0.000 mm ± 0.0/0.3 mm	REV. 版本 A.0	DATE 日期 2007-02-13		
(C)					0.00 mm ± 0.15 mm				
(E)					0.0 mm ± 0.25 mm				

U		U.0 mm	CHECKED BY		DRAWN BY
U		± U.25 mm	Michael		Valiant
E			審核	製圖	