
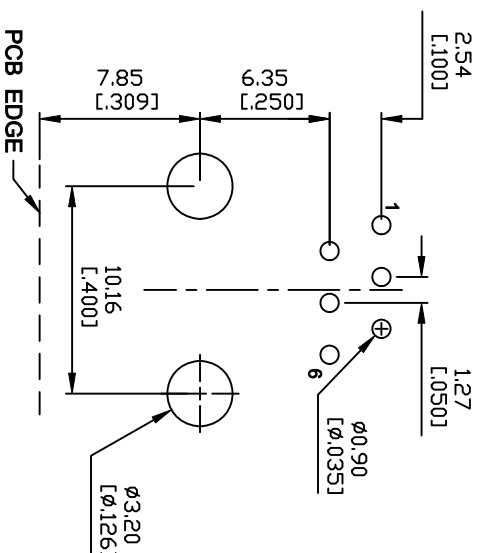
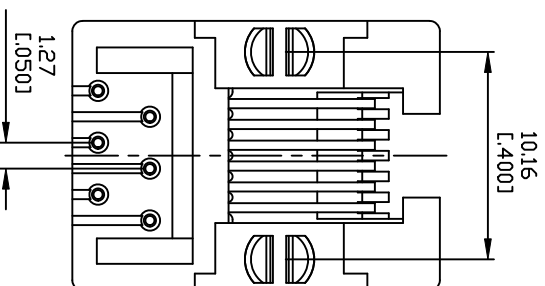
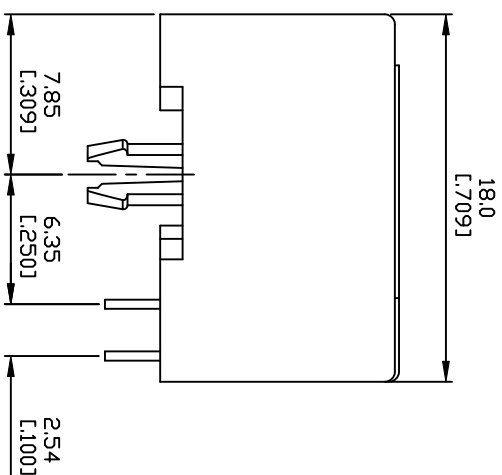


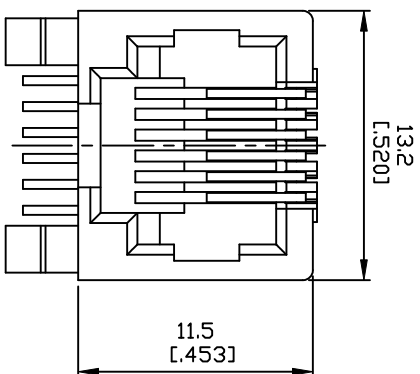


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

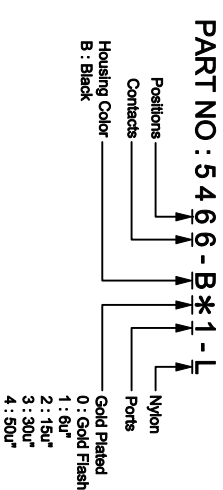

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 54 (SERIES)	TITLE	SIDE ENTRY PCB JACK	UNIT	mm
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick		圖 名		單位	inch
(B)						PART NO.	5466-B * 1-L	SCALE	1 : 1
(C)						料 號		比例	
(D)						REV.	A.1	DATE	2007-04-12
(E)						版本	日期		
						CHECKED BY	Michael	DRAWN BY	Valiant
						審 核		製 圖	

POWERWAY ELECTRONICS CO.,LTD.