
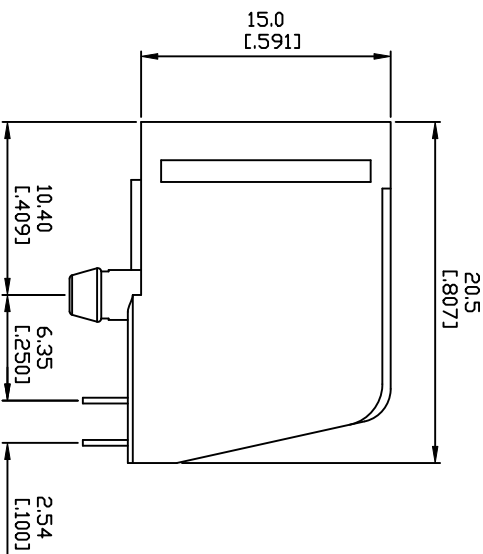


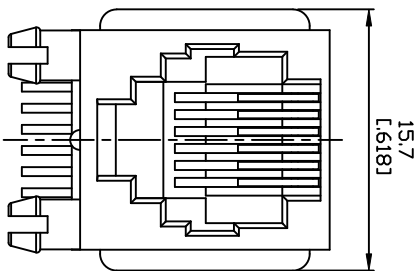

Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0




Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze

Plated With Gold And Tin In Solder Area.

CUL File No : E215573

PART NO : 6 5 6 6 - B * 1 - L

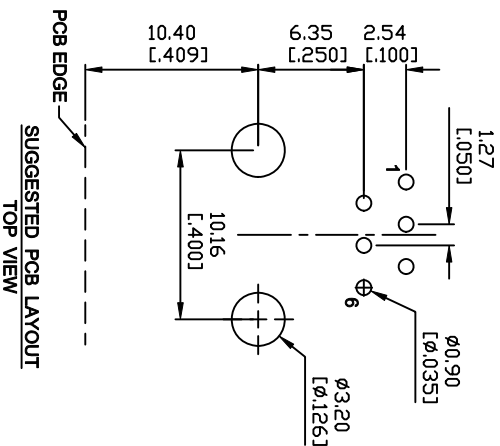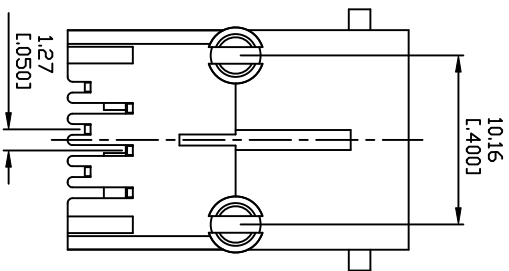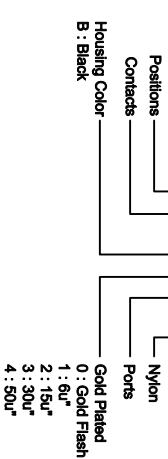

博 威 電 子 有 限 公 司
POWERWAY ELECTRONICS CO.,LTD.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 65 (SERIES)	TITLE	6P6C SIDE ENTRY PCB JACK	UNIT	mm
①	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	圖 名	6566-B * 1-L	單位	inch
②						PART NO.			
③						REV.	A.1	DATE	2007-01-29
④						CHECKED BY	Michael	DRAWN BY	Valiant
⑤						審 核		製 圖	