

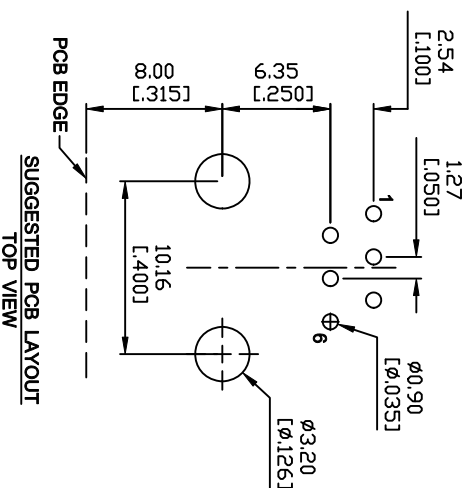
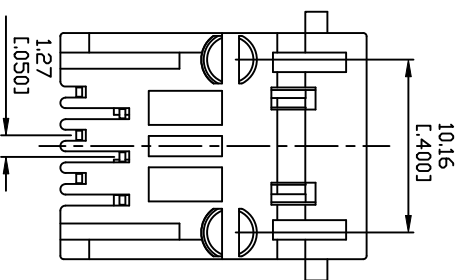
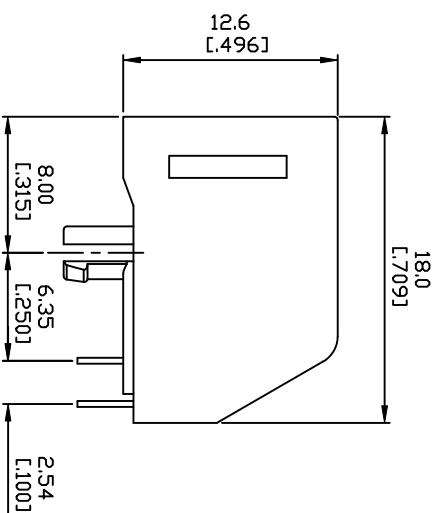


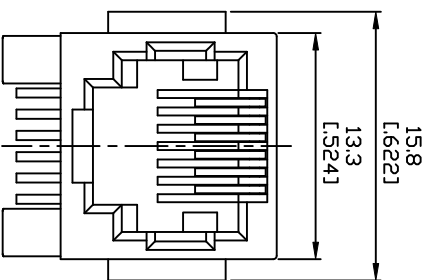

**Electrical Characteristics :**  
Insulation Resistance : 500MΩ Min.  
Contact Resistance : 50mΩ Max.  
Withstand Voltage : 1000 VAC 1 minute.  
Current Rating : 1.5A

**Material:**  
Housing: Thermoplastic UL 94V-0  
Contact : Selective Gold Plating  
Terminal: 0.35mm Thickness Phosphor Bronze  
Plated With Gold And Tin In Solder Area.  
CUL File No : E215573

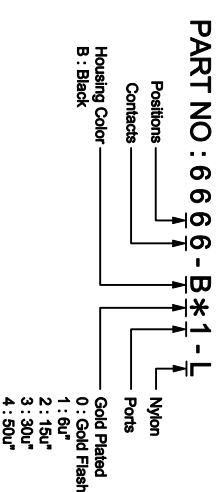

| ZONE | REV. | DESCRIPTION                     | DATE       | APPD. | FILE NO : 66 (SERIES) | TITLE      | 6P6C SIDE ENTRY PCB JACK | UNIT     | mm         |
|------|------|---------------------------------|------------|-------|-----------------------|------------|--------------------------|----------|------------|
| A    | A.1  | Withstand Voltage 500修改為1000VAC | 2008-08-01 | Nick  |                       | 圖名         | 6666-B*1-L               | 單位       | inch       |
| B    |      |                                 |            |       |                       | 料號         |                          | SCALE    | 1 : 1      |
| C    |      |                                 |            |       |                       | REV.       | A.1                      | DATE     | 2007-11-07 |
| D    |      |                                 |            |       |                       | 版本         |                          |          |            |
| E    |      |                                 |            |       |                       | CHECKED BY | Michael                  | DRAWN BY | Valiant    |
|      |      |                                 |            |       |                       | 審核         |                          | 製圖       |            |

**博 威 電 子 有 限 公 司**  
**POWERWAY ELECTRONICS CO.,LTD.**