

Electrical Characteristics :

Insulation Resistance : 500M Ω Min.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:




Housing: Thermoplastic UL 94V-0

Contact : Selective Gold Plating

**Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.**

CUL File No : E215573

PART NO: 6788-B*1-L

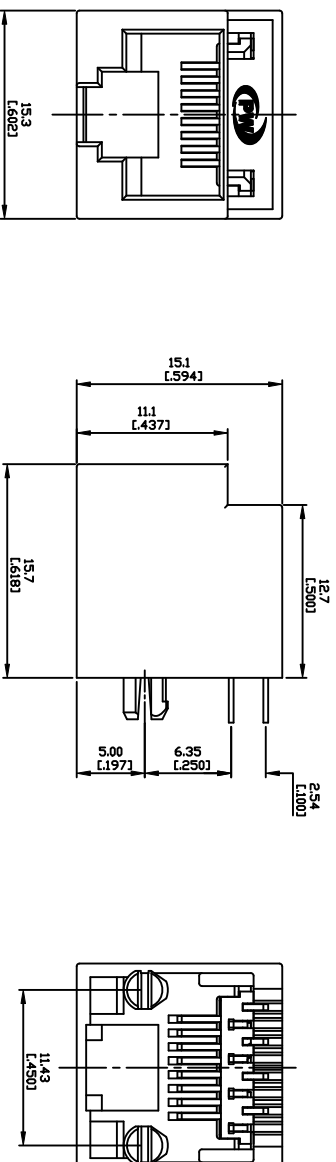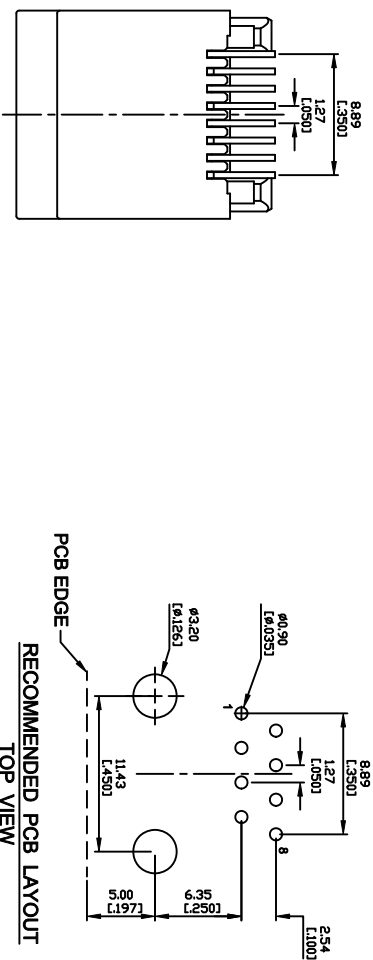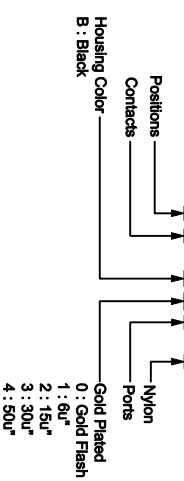

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 67 (SERIES)	TITLE 圖名	RJ45 Unshielded Receptacle Vertical 1 Port THT	UNIT 單位	mm inch
Ⓐ					TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料號 6788-B*1-L		SCALE 比例 1:1	 
Ⓑ									
Ⓒ									
Ⓓ									
Ⓔ									
CHECKED BY 審核						Aaron	DRAWN BY 製圖	Eric	